



# Wristband Issuer

## DESCRIPTION

Refilling of magazines can be done away from the machine, while it continues to work with other magazine or spare magazine can be in use. Changing the magazine is done almost instantly.



Wristband Issuer is designed to **issue contact-less RFID Metra Wristbands**. It is Metra ELS, ELS NET or LCC NET component normally used where automatic ticket issuing is required. Wristband Issuer is designed to operate in conjunction with different Automatic Vending Machines via XML over TCP/IP software interface. Operating parameters as well as Ticket access rights are defined in Metra ELS/LCC NET software. For some type of tickets (I-CODE) software interface also allows the Automatic Vending Machine to write user defined data on the ticket. Most commonly four magazines of tickets are used, providing constant ticket flow. Refilling of magazines can be done away from the machine, while it continues to work with other magazine or spare

magazine can be in use. Changing the magazine is done almost instantly. The machine also features a container for possibly unsuccessfully encoded (non-working) tickets. Simple, reliable and easy exchangeable parts keep the machine going. Everything combined makes the Wristband Issuer compact, versatile and reliable component for many applications associated with Automatic Ticket issuing.





- **Used in combination with Automatic Vending and Payment Terminals of different manufacturers**
- **Different RFID media in Metra Wristbands supported (see order codes)**
- **Metra ELS NET component accessible via XML over TCP/IP software interface**
- **Software interface allows custom write operation for some RFID media (I-CODE)**
- **4 Wristband Magazines of 100 each are supported**
- **Signals low wristband magazine warning**
- **Operating parameters defined in Metra LCC NET software**
- **Tamper Alarm sensor on doors and magazines**

**Metra**  
inženiring d.o.o.

Špruha 19  
1236 Trzin  
Slovenia  
tel.: +386 1 561 07 40  
fax: +386 1 561 07 44  
www.metra.si

## TECHNICAL DATA:

- Power 24 VDC / 2.5 A
- Tamper sensor integrated
- Door status (opened/closed) sensor input
- CAN network.
- Non volatile memory to store operational parameters
- Accessible via XML over TCP/IP software interface as Metra ELS/LCC NET device
- Different RFID Media supported (see order codes bellow)
- Temperature working range: -0°C up to +50°C
- Dimensions in mm (w/h/d): 740/1760/325

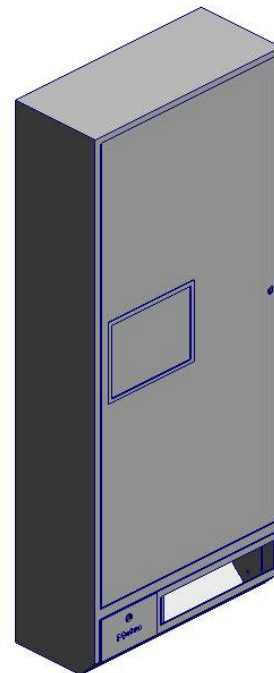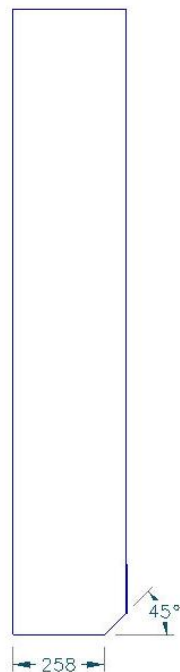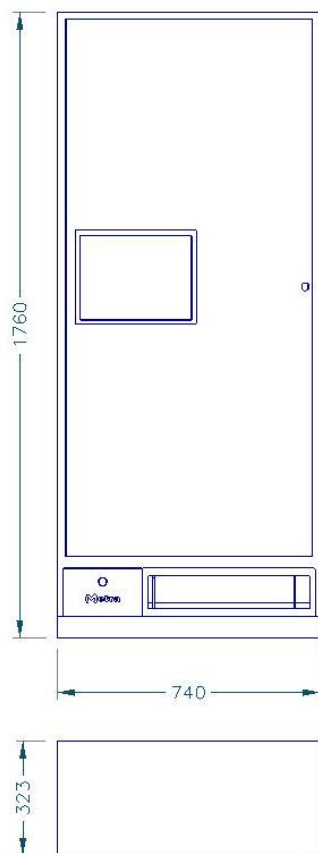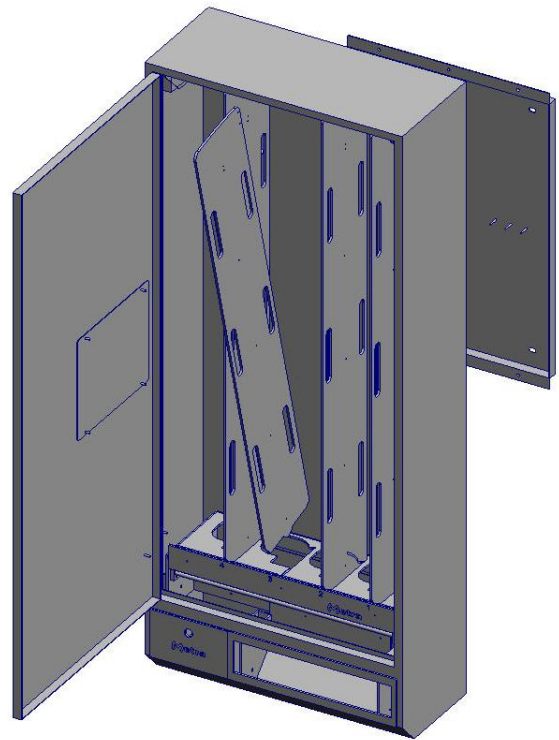

## HOW TO ORDER?

1	2	3
EL	WI	IS MF A

### Column 1:

EL ... Supports standard RFID Tickets

### Column 2:

WI ... Wristband Issuer

### Column 3:

IS	ISO 15693 reader 13,56 MHz. Issues ISO15693 compatible and ISO 14443A/B RFID Metra Wristbands.
MF	Mifare reader. Issues Mifare RFID Metra Wristbands.
A	Tagsys reader. Issues Tagsys C240 RFID Metra Wristbands.

## ORDER CODES:

### Wristband Issuer



ORDER CODE:

**ELWI\_\***

**Note:**

*\*For order codes see above!*

## ORDER CODES Accessories:

### Refilling Magazine for 100 Wristbands



ORDER CODE:

**SA000850**